




## GB...-DW-Series

# DOUBLE-WALLED FOR BETTER PROTECTION

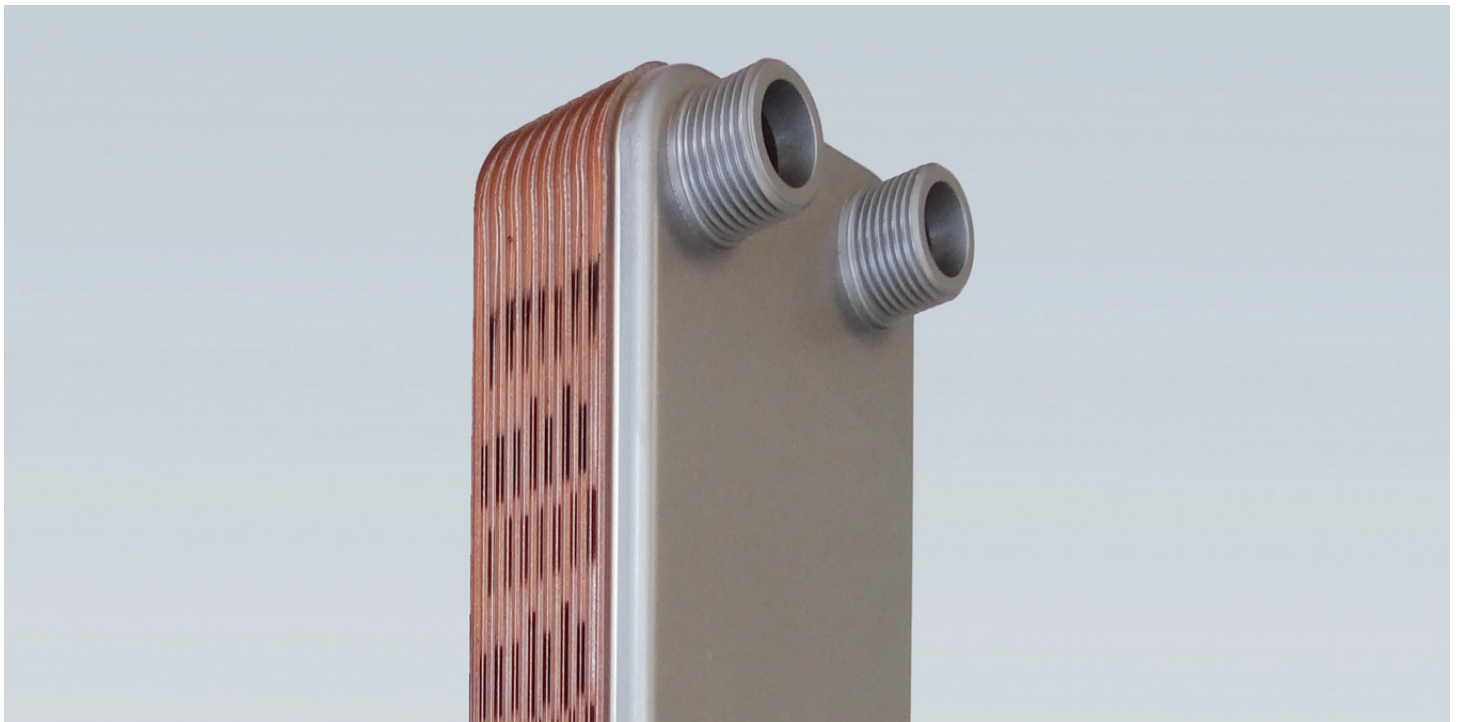

### GB...-DW-Series

The great demands, Kelvion has for developing individual solutions, form the basis for your applications with the highest safety standards. The heat exchangers of GB ... -DW-Series consist of double-walled, hermetically sealed plates. The system convinces with two stainless steel plates instead of one, at which the second wall not only separates the media from each other, but also makes the leak visible. Thus, the mixing of the media of primary and secondary side in case of a leakage is impossible. With the GB ... -DW-Series Kelvion offers reliability, efficiency and highest safety in one product.

The robust plate construction and the optimized plate design ensure high pressure resistance. For requirements up to 140 bar/2031psi, a double-wall version with pressure frame was developed in addition.

### Always a suitable solution at hand


The brazed plate heat exchangers from Kelvion offer tailor-made solutions for the widest range of application. We configure the most economically favorable model for you from the wide range of available sizes and the numerous optional features. We adapt this with individually positioned connections to meet your specific requirements.

### Examples:

- potable water heating
- applications for safety heat exchangers
- oil cooling

### Your advantages at a glance:

- double-walled safety construction
- reliable media separation
- powerful
- space-saving

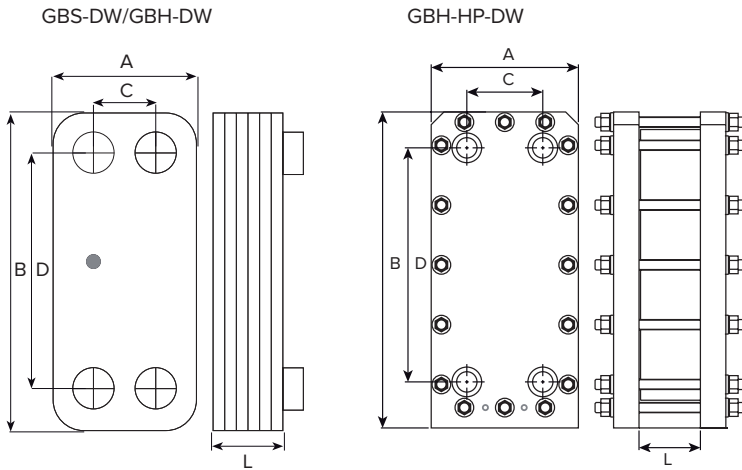

**We need following information to select your optimum heat exchanger**

- required temperature range
- flow rates or required heat load
- maximal permitted pressure drop
- required working conditions

| Type                  | (bar)    | Standard dimensions (mm) |     |    |     | (mm)                                | (kg)                         | (Litre/Channel) |                       |
|-----------------------|----------|--------------------------|-----|----|-----|-------------------------------------|------------------------------|-----------------|-----------------------|
| Plate heat exchanger  | Pressure | A                        | B   | C  | D   | L-Dimension<br>N = number of plates | Mass<br>N = number of plates | Volume          | Max. number of plates |
| <b>GBS-DW 400H</b>    | 16       | 124                      | 335 | 73 | 281 | 12.00+2.40xN                        | 1.62+0.170xN                 | 0.065           | 100                   |
| <b>GBH-DW 400H</b>    | 45       | 124                      | 335 | 73 | 281 | 12.00+2.40xN                        | 1.62+0.170xN                 | 0.065           | 100                   |
| <b>GBS-DW 500H</b>    | 16       | 124                      | 532 | 73 | 478 | 12.00+2.40xN                        | 2.02+0.270xN                 | 0.100           | 100                   |
| <b>GBH-DW 500H</b>    | 45       | 124                      | 532 | 73 | 478 | 12.00+2.40xN                        | 2.02+0.270xN                 | 0.100           | 100                   |
| <b>GBH-HP-DW 400H</b> | 120      | 195                      | 403 | 73 | 281 | 76,50+2,40xN                        | 42,00+0,210xN                | 0,065           | 100                   |
| <b>GBH-HP-DW 500H</b> | 140      | 195                      | 600 | 73 | 478 | 12.00+2.40xN                        | 77.8+0.270xN                 | 0.100           | 100                   |

**GB...-DW-Series: Specifications**

- plate material: Stainless steel AISI 316L / 1.4404
- brazing material: Copper

**Features**


- Full Flow System™ (model 400, 500)

**Performance limits**

- working temperature: 0°C to +200°C/32°F to +392°F
- working pressure: up to 140 bar/ 2031 psi

**Approval**

- PED (CE)
- ASME VIII-1

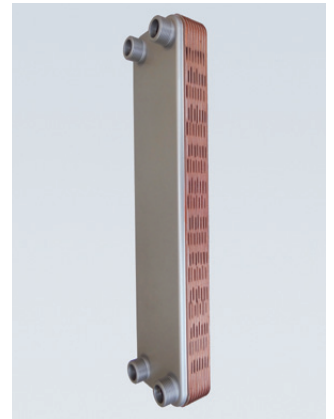

The specifications contained in this brochure are intended only to serve the non-binding description of our products and services and are not subject to guarantee. Binding specifications, especially pertaining to performance data and suitability for specific operating purposes, are dependent upon the individual circumstances at the operation location and can, therefore, only be made in terms of precise requests.

Kelvion Brazed PHE GmbH  
 Remsaer Straße 2a, 04603 Nobitz-Wilchwitz, Germany  
 Phone +49 34 47 55 39-0  
 Fax +49 34 47 55 39-30  
 sales.nobitz@kelvion.com  
 www.kelvion.com

Kelvion PHE GmbH  
 Karl-Schiller-Straße 1-3, 31157 Sarstedt, Germany  
 Phone +49 50 66 601-0  
 Fax +49 50 66 601-134  
 sarstedt@kelvion.com